

NOTE: The labels are used for certification and they should not fade with the wipe of petrol for 15 seconds.



The table of NULL




The table of LIVE



The table of GROUND

The red lines are for die-cutting.

Year of production, please be aware of the change

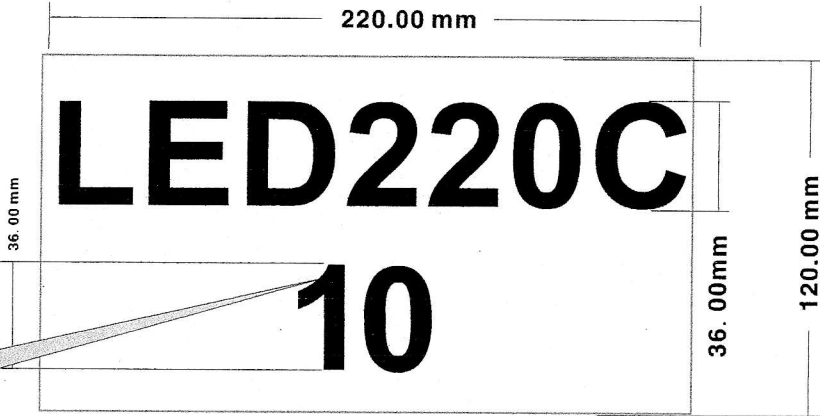

90.00 mm

Unilumin
LED Street Light

Model: UNISTWF-0006

Input: AC 100-240V 50-60Hz 2.1A 220W max
ta = 40°C max IK04 IP65

Light source: 9*LED modules (26 pieces of 1W White LEDs each), 168W in total

SHENZHEN UNILUMIN TECHNOLOGY CO., LTD.

45.00 mm

Unilumin
LED Street Light

Model: UNISTWF-0007

Input: AC 100-240V 50-60Hz 1.2A 140W max
ta = 40°C max IK04 IP65

Light source: 4*LED modules (26 pieces of 1W White LEDs each), 112W in total

SHENZHEN UNILUMIN TECHNOLOGY CO., LTD.

Unilumin
LED Street Light

Model: UNISTWF-0008

Input: AC 100-240V 50-60Hz 0.7A 70W max
ta = 40°C max IK04 IP65

Light source: 2*LED modules (26 pieces of 1W White LEDs each), 56W in total

SHENZHEN UNILUMIN TECHNOLOGY CO., LTD.




Unilumin
LED Street Light

Model: UNISTWF-0009

Input: AC 100-240V 50-60Hz 0.4A 40W max
ta = 40°C max IK04 IP65

Light source: 1*LED modules (26 pieces of 1W White LEDs each), 26W in total

SHENZHEN UNILUMIN TECHNOLOGY CO., LTD.

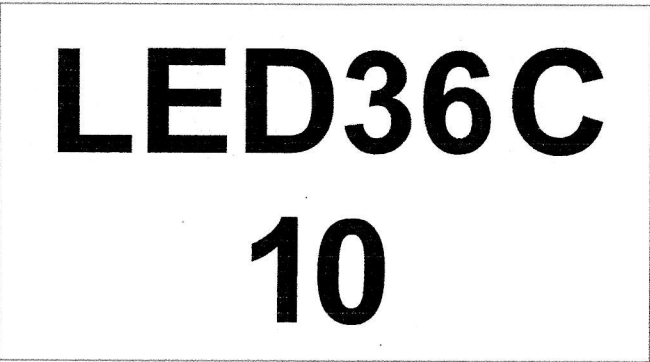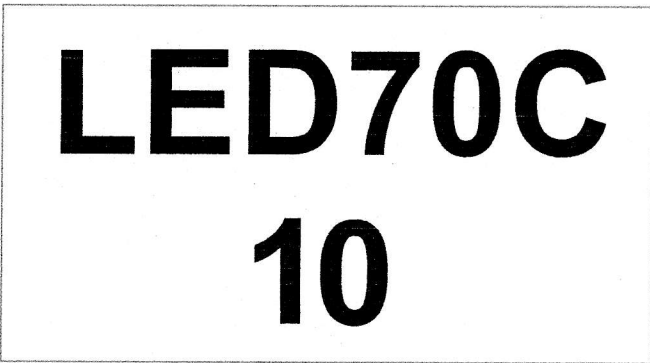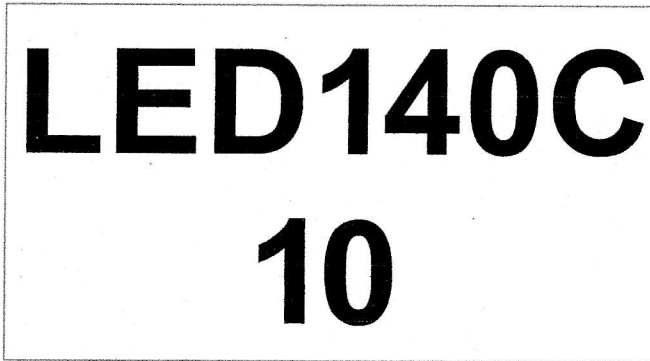

— Die-cutting line

Black letter with silver ground