

Saturn

LED Pole mount



Saturn

LED pole mount


code	lumens	power	setting
SATURN - P	2,616	25W	250mA
SATURN - P	3,200	30W	350mA
SATURN - P	3,845	38W	400mA
SATURN - P	4,167	43W	450mA
SATURN - P	4,550	46W	500mA
SATURN - A	2,372	25W	250mA
SATURN - A	2,900	30W	350mA
SATURN - A	3,486	38W	400mA
SATURN - A	3,778	43W	450mA
SATURN - A	4,125	46W	500mA

Options (add suffix to code)


--- / 3MPOLE	3 metre high pole with black finish
--- / 4MPOLE	4 metre high pole with black finish
--- / 5MPOLE	5 metre high pole with black finish

Applications

Commercial and public area
 Coastal and marine environments
 Where maintenance, water, saline fog or dust is a concern
 Where instant start and longevity is paramount



SATURN - P
 FORWARD THROW DISTRIBUTION
 Incremental tilting feature

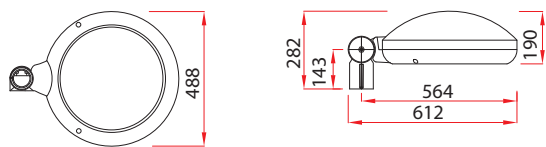


Features


Body of die cast aluminium
 High performance 4300 kelvin LED with >75 CRI
 Polyester black powdercoat finish
 Tempered 5mm thick glass lens
 Cut - off distribution (forward throw or side throw)
 Construction IP65
 Protection against dust and moisture
 UV and saline fog resistant
 Stainless steel screw fixings
 Weight : Saturn P : 8Kg / Saturn A : 9.5Kg
 Supplied c/w M20 cable gland (cable 9 - 11mm)
 Maximum power : 46 watts
 Default driver setting at 500mA / 46 watts
 Supplied c/w pole, base plate and rag-bolt assembly
 Refer VERSALUX for further pole details

Driver

Integral LED driver (setting at 500mA default)
 Adjustable 250 - 500mA for variable lumen output
 1 - 10volt dimming
 For detailed driver specifications refer VERSALUX



SATURN - A
 STREETLIGHT SIDE THROW DISTRIBUTION

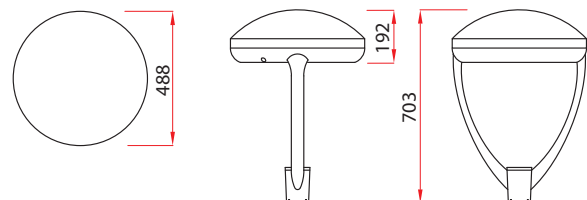

For a precision computer lighting design of your project or further technical information, contact the nearest Versalux office

The information contained in this literature is correct at time of publication Feb 2014 and subject to change without notice

Contacts

www.versalux.com.au | www.archilux.com.au | www.versalux.co.nz | www.archilux.co.nz



Head Office
 Melbourne, Australia
 t: (+61) 3 8878 2000
 f: (+61) 3 8878 2099
 e: sales@versalux.com.au
 w: www.versalux.com.au



Australian Offices
 • Melbourne • Sydney
 • Brisbane • Adelaide
 • Perth (H.I. Lighting)
 • Hobart (Electrical Agencies)



New Zealand Offices
 • Auckland